



HYDRO CONNECT DROP HOSE

FOR CENTRE PIVOT & LATERAL MOVE IRRIGATION SYSTEMS




Constructed specifically for drop applications on centre pivot and lateral move irrigation systems, Hydro Connect Drop Hoses are Australia's most popular and widely used hoses for this application.

HC-DHS Standard Drop Hose (Black) is a flexible medium burst strength hose with a solid PVC inner core and a highly durable PVC cover which provides excellent weathering ability and ultraviolet protection. Standard drop hose incorporates knitted polyester reinforcement between the PVC cover and the inner core.

HC-DHBLU, HC-DHDKB & HC-DHRED Coloured Drop Hoses are ultra flexible high burst strength hoses with a solid PVC core and a nitrile modified PVC cover which provides excellent weathering ability and ultraviolet protection. The coloured hoses incorporate 16 strand high tenacity knitted polyester reinforcement between the nitrile modified PVC cover and the inner core. The enhanced flexibility of the coloured drop hose results in straighter drops and the extended warranty provides greater peace of mind.

HC-DHP Sureline® Heavy Duty Drop Hose (Black) is an extremely kink resistant high burst strength hose with a solid extruded EPDM synthetic rubber core wrapped with a spiral reinforced synthetic yarn and covered with a black Versigard® extruded seamless jacket. It is a heavy duty drop hose recommended for Variable Rate Irrigation (VRI) and very low temperature applications.

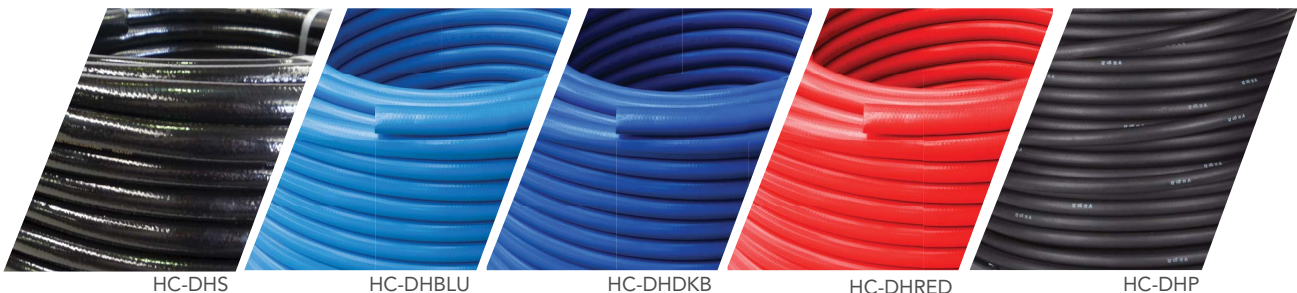

HC-DHS

HC-DHBLU

HC-DHDKB

HC-DHRED

HC-DHP



APPLICATION : CENTRE PIVOT & LATERAL MOVE IRRIGATION SYSTEMS
TYPE : MULTIPUPOSE TRANSFER

	STANDARD	COLOURED			PREMIUM
CODE	HC-DHS	HC-DHBLU	HC-DHDKB	HP-DHRED	HC-DHP
COVER COLOUR	BLACK	BLUE	DARK BLUE	RED	BLACK
INNER	PVC	PVC			EPDM® SYNTHETIC RUBBER
COVER	PVC	NITRILE MODIFIED PVC			VERSIGARD® SYNTHETIC RUBBER
REINFORCEMENT	KNITTED POLYESTER	16 STRAND HIGH TENACITY KNITTED POLYESTER			SPIRAL SYNTHETIC YARNS
INTERNAL DIAMETER (mm)	20.0 +/- 0.25	20.0 +/- 0.25			19.1 NOM
WALL THICKNESS (mm)	2.3 +/- 0.10	2.3 +/- 0.10			4.15 NOM
MAX. WORKING PRESSURE (kPa)	700	1000			1000
COIL LENGTH (m)	76	76			76
COIL WEIGHT (kg)	18.5	18.5			37.5
METRE MARKS	YES	YES			NO
BRANDS	HYDRO CONNECT™	HYDRO CONNECT™			SURELINE®
MANUFACTURED	AUSTRALIA	AUSTRALIA			USA
WARRANTY	1 YEAR	2 YEARS			1 YEAR

Drop Hose Clamp
1 1/16" (for 3/4" Drop Hose; Stepless)
#HC-DHC075



HD Drop Hose Clamp
1 3/16" (for sureline® Hose; Stepless)
#HC-DHC075P



Worm Drive Clamp
(for all Drop Hose)
#HC-DHC075WD



Hose Clamp Tool
Standard
#HC-DHCTOOL

Long Handle
#HC-DHCTOOLLH



Hose Clamp Tool
Compound Action
Pincer
#HC-DHCTOOLCAP



Hose Clamp Tool
Pneumatic
#HC-DHCTOOLAIR

